

# Numerical analysis of the laminar forced heat convection between two coaxial cylinders

Ioan Sarbu and Anton Iosif

**Abstract**— This paper presents a study of the dual reciprocity boundary element method (DRBEM) for the laminar heat convection problem between two coaxial cylinders with constant heat flux boundary condition. DRBEM is one of the most successful technique used to transform the domain integrals arising from the non-homogeneous term of the Poisson equation into equivalent boundary only integrals. This recently developed and highly efficient numerical method is tested for the solution accuracy of the fluid flow and heat transfer study between two coaxial cylinders. Since their exact solutions are available, DRBEM solutions are verified with different number of boundary element discretizations and internal points. The results obtained in this study are discussed with the relative error percentage of velocity and temperature solutions, and potential applicability of the method for the more complicated heat convection problems with arbitrary duct geometries.

**Keywords**— Coaxial cylinders, Dual reciprocity boundary element method, Heat flux boundary condition, Laminar heat convection, Numerical analysis.

## I. INTRODUCTION

AMONG the various numerical methods, the boundary element method (BEM) becomes one of the favorite analysis tool ever since its introduction to the solution of heat transfer problems. Its advantage over the finite difference or the finite element methods comes from the fact that instead of full domain discretization, only the boundary is discretized into elements and internal point position can be freely defined. Therefore the quantity of data necessary to solve the problems can be greatly reduced [8].

Until recent years the main area of the BEM application has been limited to the conduction heat transfer problems among different heat transfer modes and therefore, with various research efforts, BEM for the solution of heat conduction direct or inverse problem is now well established [13], [18]. However BEM study for the application of heat convection problems can be considered as insufficient and in still developing stage. Since the convection effects are of considerable importance in many heat transfer phenomena, they need much more research focus. The main difficulties of the BEM application to such problems are due to the facts that

the fundamental solutions are only available for the few governing equation types and, except Laplace equation, additional domain discretization is required to account source type domain integral terms [34].

The dual reciprocity boundary element method (DRBEM) which was introduced by Nardini and Brebbia [22] is thus far the most successful technique for dealing with above mentioned lack of fundamental solution types and domain integral problems. Since its introduction DRBEM has been applied in many field of engineering problems [26], [28], [36]. In the DRBEM, available fundamental solution is used for the complete governing equation, and domain integral arising from the heat source-like term is transferred to the boundary by using the radial basis interpolation functions [27], [37].

This paper presents the application of DRBEM to the Poisson type equations, and fully developed laminar convection heat transfer problems between two coaxial cylinders are illustrated as their applicable examples. The concentric annulus is chosen because of its simplicity and available exact solutions, so that basic nature of the proposed method for the convection problems can be analyzed and revealed in a detailed manner [17], [19]. Therefore present research efforts are confirmed within basic study aiming at the establishment of DRBEM's applicability for the heat convection analysis to be eventually extended in the future study of various heat transfer system.

In this paper, hydrodynamically and thermally fully developed laminar flow with uniform heat flux through thermal boundary between two coaxial cylinders is studied by using the DRBEM. To verify the methods on heat convection problems, numerical solutions with different number of boundary element discretizations and internal points are compared with the exact solutions for its convergence and accuracy.

## II. FORMULATION OF THE PROBLEM

Consider an incompressible Newtonian fluid flow in a concentric annular tube as shown in Fig. 1. In the system to be analyzed,  $z$  coordinate represents the axial direction and  $x$ - $y$  coordinates are attached to the cross-sectional surface. The inner and outer cylinder radii are taken as  $R_i$  and  $R_o$ . For the fully developed steady laminar flow with constant transport properties and negligible body forces, Navier-Stokes equation becomes simple pressure-driven Poiseuille flow equation. Since the flow is fully developed, axial flow velocity is a function of only  $x$ - $y$  coordinates, and axial pressure gradient is constant.

Ioan Sarbu is currently a Professor and Department Head at the Building Services Department, "Politehnica" University of Timisoara, 300233 ROMANIA, e-mail address: ioan.sarbu@ct.upt.ro

Anton Iosif is currently a Lecturer at the Building Services Department, "Politehnica" University of Timisoara, 300233 ROMANIA, e-mail address: anton.iosif@ct.upt.ro

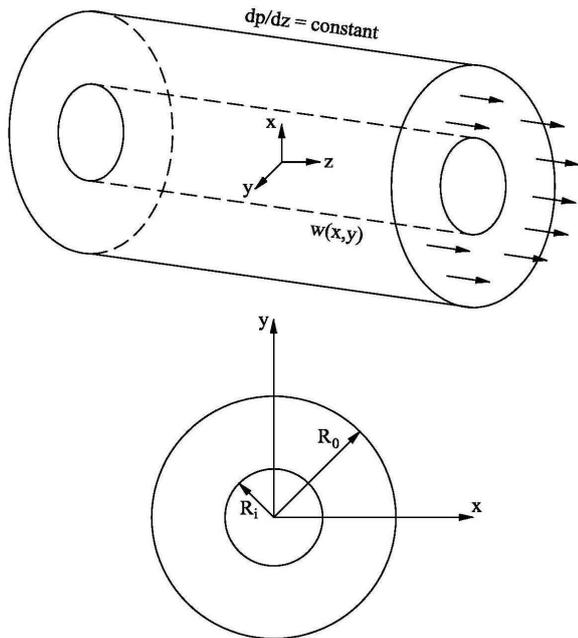


Fig. 1 Geometry of the concentric annular tube

In the energy equation, the viscous dissipation and axial heat conduction effects are neglected. Therefore the governing equation can be expressed in the form of a Poisson equation as follows:

– momentum equation:

$$\nabla^2 w = \frac{\partial^2 w}{\partial x^2} + \frac{\partial^2 w}{\partial y^2} = \frac{1}{\mu} \frac{dp}{dz} \quad (1)$$

– energy equation:

$$\nabla^2 T = \frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} = \frac{w}{a} \frac{dT_m}{dz} \quad (2)$$

in which:  $w$  is the axial flow velocity;  $\mu$  – coefficient of viscosity;  $p$  – pressure;  $T$  – temperature;  $a = \lambda / \rho c$  – thermal diffusivity.

For the thermally fully developed flow with constant heat flux boundary condition, (2) can be rewritten by using the mixed mean temperature  $T_m$  [19] as:

$$\nabla^2 T = \frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} = \frac{w}{a} \frac{dT_m}{dz} \quad (3)$$

where  $\partial T / \partial z = dT_m / dz = \text{const.}$  from the given conditions. The boundary conditions associated with (1) and (3) are:

$$w = 0 \text{ at } R = R_i, \quad w = 0 \text{ at } R = R_o \quad (4)$$

$$T = T_i \text{ at } R = R_i, \quad T = T_o \text{ at } R = R_o \quad (5)$$

where subscripts  $i$  and  $o$  represent for the inner and outer surfaces.

For the solution of temperatures, velocity from (1) is obtained first and then (3) can be solved in sequence since the assumption of constant viscosity uncoupled the momentum and energy equations.

### III. DUAL RECIPROCITY BOUNDARY ELEMENT EQUATION

For the BEM solution, (1) and (3) subject to (4) and (5) can be generalized as the following type of Poisson equation [26]:

$$\nabla^2 u(x, y) = b(x, y), \quad (x, y) \in \Omega \quad (6)$$

with the boundary conditions:

$$u(x, y) = \bar{u}, \quad (x, y) \in \Gamma_1 \quad (7)$$

$$q(x, y) = \frac{\partial u(x, y)}{\partial n} = \bar{q}, \quad (x, y) \in \Gamma_2 \quad (8)$$

and to represent convective heat transfer problems:

$$u(x, y) = w, \quad b(x, y) = \frac{1}{\mu} \frac{dp}{dz} = \text{const.} \quad (9)$$

$$u(x, y) = T, \quad b(x, y) = \frac{w}{a} \frac{dT_m}{dz}$$

where:  $\Gamma_1 + \Gamma_2 = \Gamma$  is the total boundary of solution domain  $\Omega$ ;  $n$  – normal to the boundary;  $\bar{u}$  and  $\bar{q}$  – specified values at each boundary.

Applying the usual boundary element technique to (6), an integral equation can be deduced as follows [8]:

$$c_i u_i + \int_{\Gamma} u q^* d\Gamma - \int_{\Gamma} q u^* d\Gamma = \int_{\Omega} b u^* d\Omega \quad (10)$$

where the constant  $c_i$  depends on the geometry at point  $i$  as:

$$c_i = \begin{cases} 1 & \text{for } (x_i, y_i) \in \Omega \\ \frac{\theta}{2\pi} & \text{for } (x_i, y_i) \in \Gamma \end{cases} \quad (11)$$

where  $\theta$  is the angle between the tangent to  $\Gamma$  on either side of point  $i$ .

The key method of DRM is to take the domain integral of equation (10) to the boundary and remove the needs of complicated domain discretization. To accomplish this idea, the source term  $b(x, y)$  is expanded as its values at each node  $j$  and a set of interpolating functions  $f_j$  are used as [26], [28], [36]:

$$b(x, y) \cong \sum_{j=1}^{N+L} \alpha_j f_j \quad (12)$$

where:  $\alpha_j$  is a set of initially unknown coefficients;  $N+L$  – the number of boundary nodes plus internal points.

If the function  $\bar{u}_j$  can be found such that:

$$\nabla^2 \bar{u}_j = f_j \quad (13)$$

then the domain integral can be transferred to the boundary.

Substituting (13) into (12), and applying integration by parts twice for the domain integral term of (10) leads to:

$$c_i u_i + \int_{\Gamma} u q^* d\Gamma - \int_{\Gamma} q u^* d\Gamma = \sum_{j=1}^{N+L} \alpha_j \times$$

$$\times \left( c_i \hat{u}_{ij} + \int_{\Gamma} \hat{u}_j q^* d\Gamma - \int_{\Gamma} \hat{q}_j u^* d\Gamma \right) \quad (14)$$

For the two-dimensional domain of interest in this study,  $u^*$ ,  $q^*$  and  $\hat{u}$ ,  $\hat{q}$  can be derived as:

$$\begin{aligned} u^* &= \frac{1}{2\pi} \ln\left(\frac{1}{r}\right) \\ q^* &= \frac{-1}{2\pi r} \nabla r \cdot \bar{n} \end{aligned} \quad (15)$$

$$\begin{aligned} \hat{u} &= \frac{r^2}{4} + \frac{r^3}{9} \\ \hat{q} &= \left(\frac{r}{2} + \frac{r^2}{3}\right) \nabla r \cdot \bar{n} \end{aligned} \quad (16)$$

where  $r$  stands for the distance from a source point  $i$  or a DRM collocation point  $j$  to a field point  $(x, y)$ . As for the equation (13), a radial basis function  $f = 1+r$  is chosen as an interpolating function which was shown to be generally sufficient [27], [28], [37].

In the numerical solution of the integral equation (14),  $u$ ,  $q$ ,  $\hat{u}$  and  $\hat{q}$  in the integrals are modelled using the linear interpolation functions as:

$$\int_{\Gamma_k} u q^* d\Gamma = u_k h_{ik}^1 + u_{k+1} h_{ik}^2 \quad (17)$$

$$\int_{\Gamma_k} q u^* d\Gamma = q_k g_{ik}^1 + q_{k+1} g_{ik}^2 \quad (18)$$

$$\int_{\Gamma_k} \hat{u}_j q^* d\Gamma = \hat{u}_{kj} h_{ik}^1 + \hat{u}_{(k+1)j} h_{ik}^2 \quad (19)$$

$$\int_{\Gamma} \hat{q}_j u^* d\Gamma = \hat{q}_{kj} g_{ik}^1 + \hat{q}_{(k+1)j} g_{ik}^2 \quad (20)$$

where:

$$h_{ik}^1 = \int_{\Gamma_k} \Phi_1 q^* d\Gamma, \quad h_{ik}^2 = \int_{\Gamma_k} \Phi_2 q^* d\Gamma \quad (21)$$

$$g_{ik}^1 = \int_{\Gamma_k} \Phi_1 u^* d\Gamma, \quad g_{ik}^2 = \int_{\Gamma_k} \Phi_2 u^* d\Gamma \quad (22)$$

Here the first subscript of (21) and (22) refers to the specific position of the point where the flow velocity or temperature is evaluated; the second subscript refers to the boundary element over which the contour integral is carried out. The superscript 1 and 2 designate the linear interpolation function  $\Phi_1$  and  $\Phi_2$  respectively, with which the  $u^*$  and  $q^*$  functions are weighted in the integrals in equation (17) through (20).

For the boundary  $\Gamma = \Gamma_1 \cup \Gamma_2$  discretized into  $N$  elements, integral terms in equation (14) can be rewritten as:

$$\int_{\Gamma} u q^* d\Gamma = \sum_{k=1}^N \int_{\Gamma_k} u q^* d\Gamma = \sum_{k=1}^N [h_{i(k-1)}^2 + h_{ik}^1] u_k =$$

$$= \sum_{k=1}^N H_{ik} u_k \quad \text{or} \quad = \sum_{j=1}^{N_n} H_{ik} \hat{u}_{kj} \quad \text{for} \quad \hat{u}_j \quad (23)$$

$$\begin{aligned} \int_{\Gamma} q u^* d\Gamma &= \sum_{k=1}^N \int_{\Gamma_k} q u^* d\Gamma = \sum_{k=1}^N [g_{i(k-1)}^2 + g_{ik}^1] q_k = \\ &= \sum_{k=1}^N G_{ik} q_k \quad \text{or} \quad = \sum_{j=1}^{N_n} G_{ik} \hat{q}_{kj} \quad \text{for} \quad \hat{q}_j \end{aligned} \quad (24)$$

where  $h_{i0}^2 = h_{iN}^2$  and  $g_{i0}^2 = g_{iN}^2$ . Introducing (23) and (24) into (14) and manipulating results yields a dual reciprocity boundary element equation as:

$$\begin{aligned} c_i u_i + \sum_{k=1}^N H_{ik} u_k - \sum_{k=1}^N G_{ik} q_k &= \sum_{j=1}^{N+L} \alpha_j \times \\ &\times \left( c_i \hat{u}_{ij} + \sum_{k=1}^N H_{ik} \hat{u}_{kj} - \sum_{k=1}^N G_{ik} \hat{q}_{kj} \right) \end{aligned} \quad (25)$$

#### IV. NUMERICAL SOLUTION

For the computer implementation of numerical solution, (25) can now be written in a matrix form as:

$$\mathbf{H}\mathbf{U} - \mathbf{G}\mathbf{Q} = (\mathbf{H}\hat{\mathbf{U}} - \mathbf{G}\hat{\mathbf{Q}})\boldsymbol{\alpha} \quad (26)$$

where  $\mathbf{H}$  and  $\mathbf{G}$  are matrices of their elements being  $H_{ik}$  and  $G_{ik}$ , with  $c_i$  being incorporated into the principal diagonal element, respectively.  $\mathbf{U}$ ,  $\mathbf{Q}$  and their terms with hat of (26) correspond to vectors of  $u_k$ ,  $q_k$  and matrices with  $j$ th column vectors of hat  $u_{kj}$ ,  $q_{kj}$ . It is noted that vector  $\boldsymbol{\alpha}$  of unknown coefficients  $j$  can be evaluated from (12) with chosen interpolating function  $f_j$  and the function  $b(x, y)$  of governing equation. Therefore introducing the boundary conditions into the nodes of  $u_k$  and  $q_k$  vectors and rearranging by taking known quantities to the right hand side and unknowns to the left hand side leads to a set of simultaneous linear equations of the form:

$$\mathbf{A}\mathbf{X} = \mathbf{B} \quad (27)$$

Using the DRBEM matrix equation, the numerical solution of laminar convection heat transfer problem in a concentric annulus can be readily obtained as  $x$  being the flow velocity  $w$  for momentum equation and also temperature  $T$  for energy equation or their normal derivatives, respectively.

Consider the geometry illustrated in Fig. 2. For the sake of simplification, the surface temperatures of two cylinders are assumed to be equal. Thus, the solution satisfies the following boundary conditions:

$$\begin{aligned} w(x, y)|_{R=R_i} &= w(x, y)|_{R=R_o} = 0 \\ T^*(x, y)|_{R=R_i} &= T^*(x, y)|_{R=R_o} = 0 \\ T^* &= T - T_w, \quad T_w = T_i = T_o \end{aligned} \quad (28)$$

As a note, no slip conditions are applied for the velocity boundary condition.

For the numerical test case, following numerical values in (1) and (3) are taken from the paper [33] where the spectral collocation method is used for the eccentric annuli heat convection analysis:

$$R_o = 0.055 \text{ m}, \quad R_i = 0.030 \text{ m}$$

$$\frac{1}{\mu} \frac{dp}{dz} = -836 \text{ m}^{-1} \cdot \text{s}^{-1}$$

$$a = 1.3418 \times 10^{-9} \text{ m}^2/\text{s}$$

$$\frac{dT_m}{dz} = 0.47 \text{ }^\circ\text{C}/\text{m}$$

V. RESULTS AND DISCUSSION

In order to confirm the accuracy of the dual reciprocity boundary element method for the present heat convection

problem, each boundary of outer and inner surface is equally discretized as 36, 48, 60, 72 and 84 elements respectively. The nodes on every boundary and the internal points of the analysis domain are located as shown in Fig. 2. Therefore total number of internal points used in the analysis are 90, 120, 150, 180 and 210 for each 36, 48, 60, 72 and 84 boundary element cases respectively.

To obtain the axial flow velocity distribution  $w(x,y)$ , equation (1) is solved first. Their results for the boundary and internal nodes are shown in Table I, for the radial basis function  $f=1+r$  and in Table II, for  $f=1+r+r^2$ . Here the normal derivative of velocity  $w$  at the boundary is listed as well, and all the numerical solutions are compared with the exact solutions [19] for their accuracy.

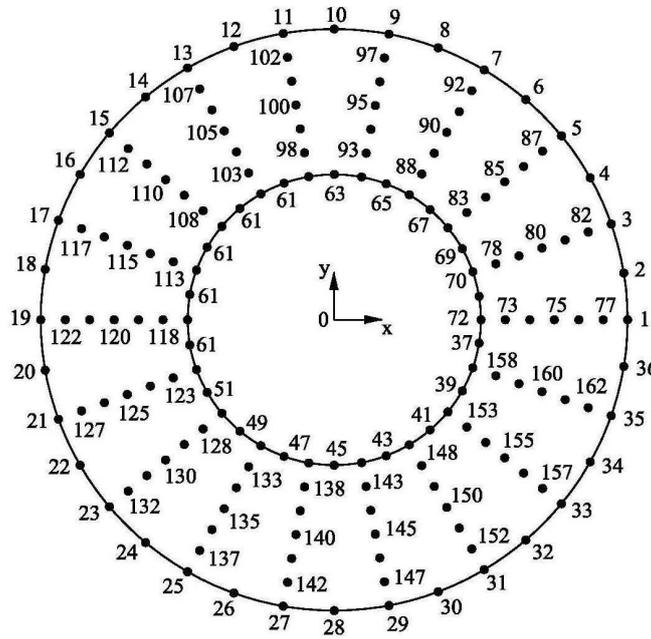


Fig. 2 Boundary element nodes and internal points for the system to be analyzed

Table I. DRBEM results with exact solutions for the boundary and internal locations in flow velocity analysis ( $f=1+r$ )

Solution variable	Radial location $R$ [m]	DRBEM solution (number of boundary elements case)					Exact solution
		36	48	60	72	84	
$\partial w/\partial n$	0.055	-9.570611	-9.614363	-9.632446	-9.646733	-9.649446	-9.667904
$\partial w/\partial n$	0.030	-11.961390	-11.931682	-11.910987	-11.902295	-11.900702	-11.883840
$w$	0.0342	0.040336	0.039937	0.039755	0.039656	0.039614	0.039413
$w$	0.0383	0.061518	0.061112	0.060926	0.060825	0.060760	0.060591
$w$	0.0425	0.066727	0.066320	0.066133	0.066030	0.065973	0.065803
$w$	0.0466	0.057611	0.057196	0.057006	0.056908	0.056853	0.056682
$w$	0.0508	0.035084	0.034883	0.034733	0.034638	0.034606	0.034439

Table II. DRBEM results with exact solutions for the boundary and internal locations in flow velocity analysis ( $f=1+r+r^2$ )

Solution variable	Radial location	DRBEM solution (number of boundary elements case)					Exact solution
		36	48	60	72	84	

	R [m]	36	48	60	72	84	
$\partial w/\partial n$	0.055	-9.570477	-9.615427	-9.632632	-9.647164	-9.651780	-9.667904
$\partial w/\partial n$	0.030	-11.960900	-11.929878	-11.906732	-11.899952	-11.898130	-11.883840
w	0.0342	0.040334	0.039938	0.039754	0.039654	0.039601	0.039413
w	0.0383	0.061519	0.061112	0.060927	0.060820	0.060761	0.060591
w	0.0425	0.066725	0.066321	0.066136	0.066031	0.065974	0.065803
w	0.0466	0.057609	0.057193	0.057012	0.056906	0.056850	0.056682
w	0.0508	0.035080	0.034880	0.034726	0.034635	0.034604	0.034439

Fig. 3, 4, 5 and 6 show the convergence plot of DRBEM velocity and its normal derivative solutions as the number of boundary elements and internal points increase. DRBEM solutions are in close agreement with the exact solutions and relative errors are within 2.3% for the above 36 element cases.

As noted in Fig. 3 and 4 velocity solutions at location of R=0.0508 m and R=0.0342 m are less accurate than the others and, in between, R=0.0342 point gives more inaccurate solution than R=0.0508. And for the normal derivatives of velocity at boundary R=0.055 m is less accurate than R=0.030 m as shown in Fig. 5 and 6. These results are due to the facts that the outer boundary element size is larger than the inner boundary element size and distribution of internal points is getting sparse to the outward direction, whereas rapid change of velocity occurs at inner and outer boundary sides as illustrated in Fig. 2, 7 and 8.

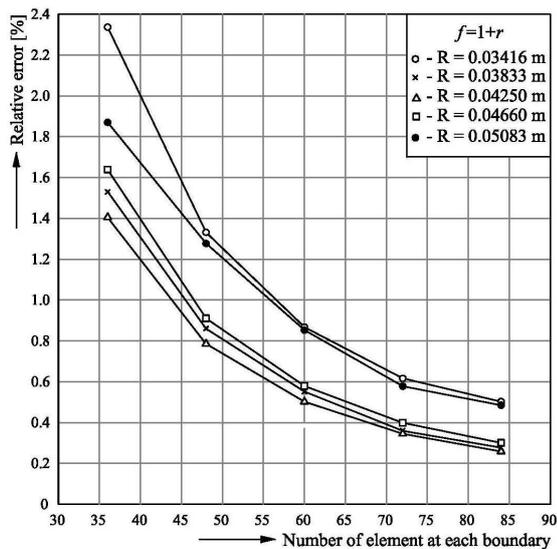


Fig. 3 Accuracy test for the velocity solution at the selected internal points

Therefore solution's error magnitude regarding to the radial location is closely related to both the physical and the mathematical aspects and nevertheless overall solution accuracy is shown to be fairly acceptable. Thus, 36 element solution case shows maximum 2.34% error at radial position R=0.0342 and later results in accurate temperature solution.

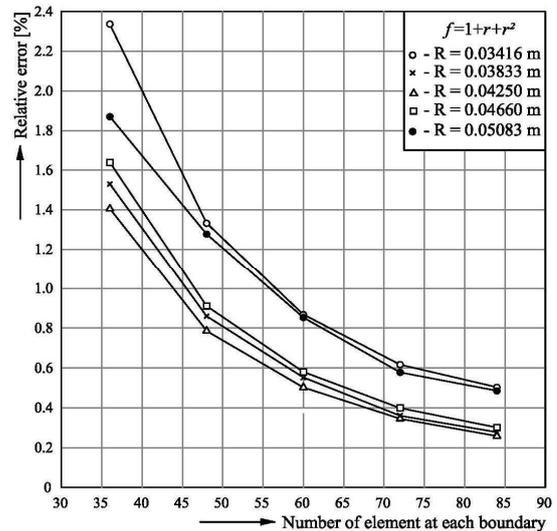


Fig. 4 Accuracy test for the velocity solution at the selected internal points

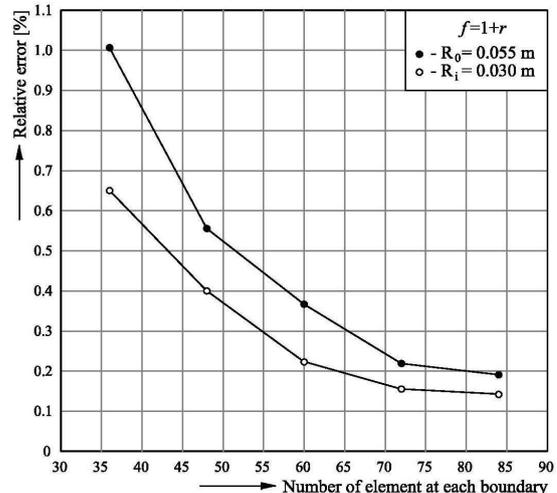


Fig. 5 Accuracy test for the normal derivative of velocity solution at the inner and outer boundaries

Then these DRM velocity solutions are, in turn, used in the energy equation (3) to solve for the temperature distribution. Tables III and IV shows the results, and it is found that DRM solutions are in excellent agreement with exact solutions and relative errors are within 5% for the above 36 element cases (Fig. 9 – 14).

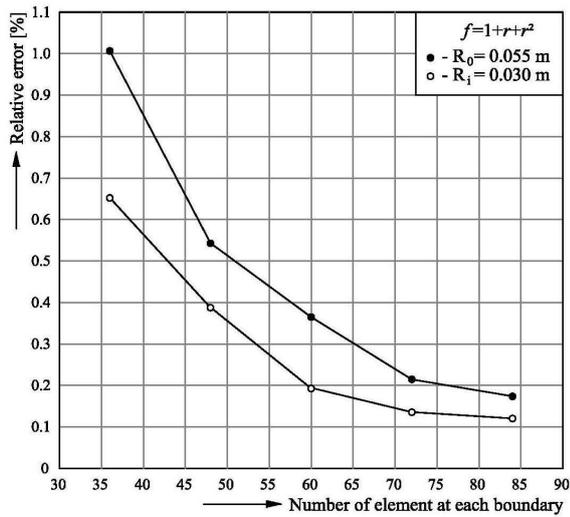


Fig. 6 Accuracy test for the normal derivative of velocity solution at the inner and outer boundaries

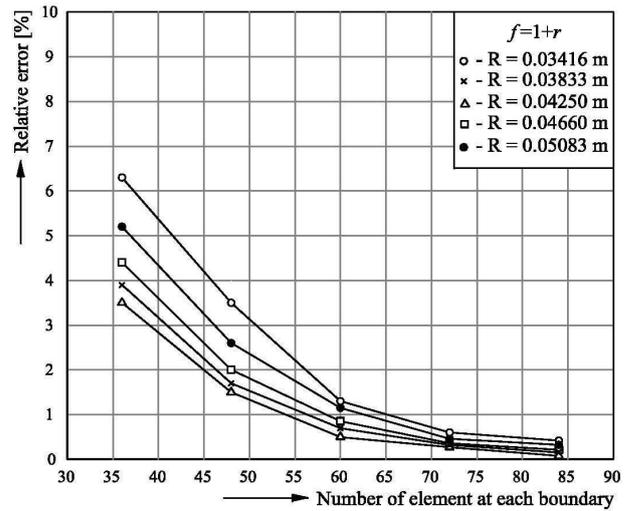


Fig. 9 Accuracy test for the temperature solution at the selected internal points

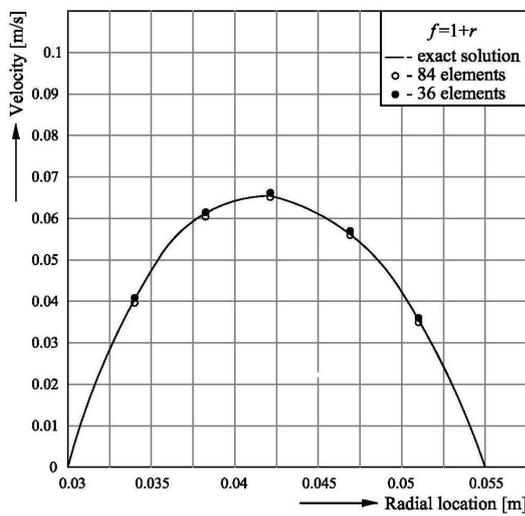


Fig. 7 Velocity profile of exact solution compared with DRBEM results

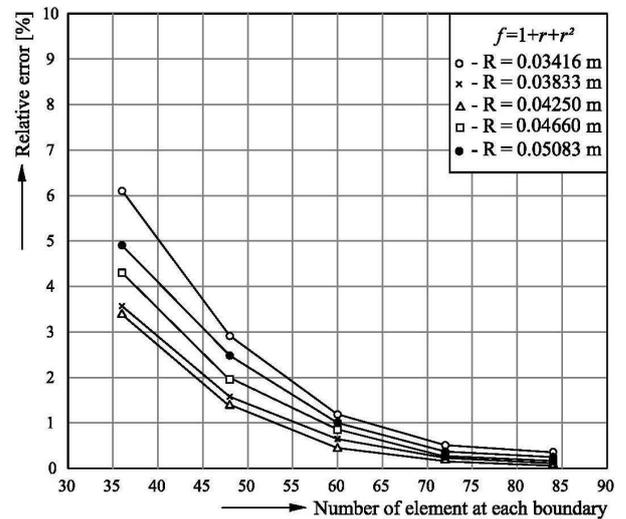


Fig. 10 Accuracy test for the temperature solution at the selected internal points

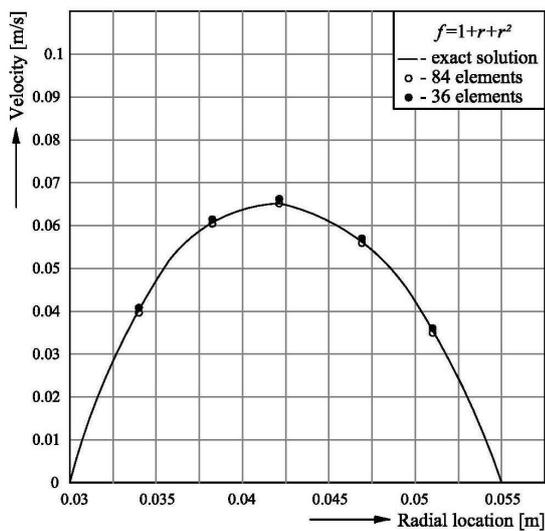


Fig. 8 Velocity profile of exact solution compared with DRBEM results

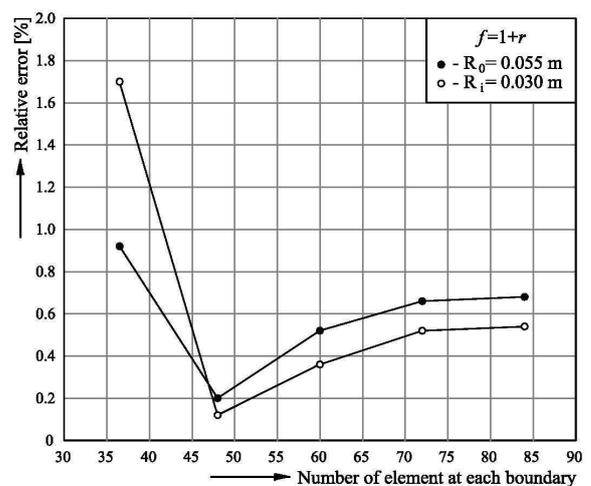


Fig. 11 Accuracy test for the normal derivative of temperature solution at the inner and outer boundaries

Table III. DRBEM results with exact solutions for the boundary and internal locations in temperature analysis ( $f=1+r$ )

Solution variable	Radial location $R$ [m]	DRBEM solution (number of boundary elements case)					Exact solution
		36	48	60	72	84	
$\partial T^*/\partial n$	0.055	172056.38	170824.22	171362.75	171600.75	171628.56	170484.20
$\partial T^*/\partial n$	0.030	233420.45	229217.02	230340.65	230698.70	230771.22	229506.90
$T^*$	0.0342	804.26	828.59	847.40	853.78	855.04	858.72
$T^*$	0.0383	1268.86	1298.52	1311.65	1315.86	1317.26	1320.13
$T^*$	0.0425	1383.48	1413.28	1426.46	1429.68	1431.26	1433.69
$T^*$	0.0466	1180.68	1209.26	1224.48	1230.46	1231.92	1234.96
$T^*$	0.0508	711.52	730.65	741.78	746.86	747.90	750.34

Table IV. DRBEM results with exact solutions for the boundary and internal locations in temperature analysis ( $f=1+r+r^2$ )

Solution variable	Radial location $R$ [m]	DRBEM solution (number of boundary elements case)					Exact solution
		36	48	60	72	84	
$\partial T^*/\partial n$	0.055	171989.88	170768.08	171293.14	171535.45	171598.75	170484.20
$\partial T^*/\partial n$	0.030	233300.36	229286.02	230294.05	230618.22	230708.55	229506.90
$T^*$	0.0342	805.85	829.69	848.14	854.14	855.78	858.72
$T^*$	0.0383	1271.14	1299.86	1312.24	1316.04	1317.68	1320.13
$T^*$	0.0425	1385.24	1414.58	1427.24	1430.02	1431.76	1433.69
$T^*$	0.0466	1182.72	1210.64	1225.78	1230.98	1232.04	1234.96
$T^*$	0.0508	713.38	731.68	742.87	747.12	748.03	750.34

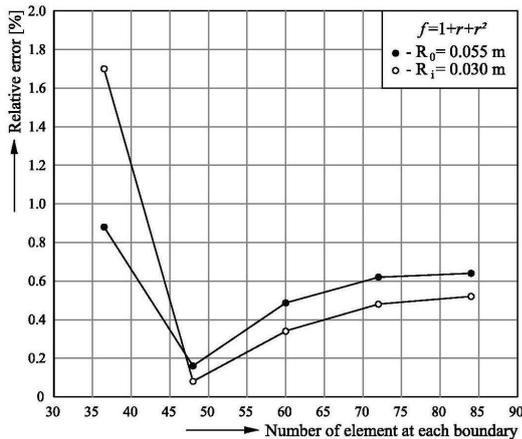


Fig. 12 Accuracy test for the normal derivative of temperature solution at the inner and outer boundaries

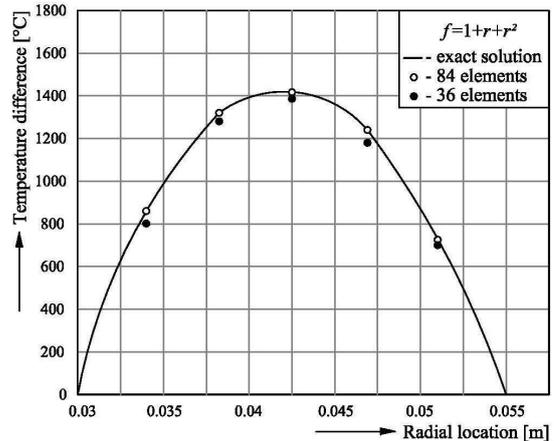


Fig. 14 Temperature profile  $T^*$  of exact solution compared with DRBEM results

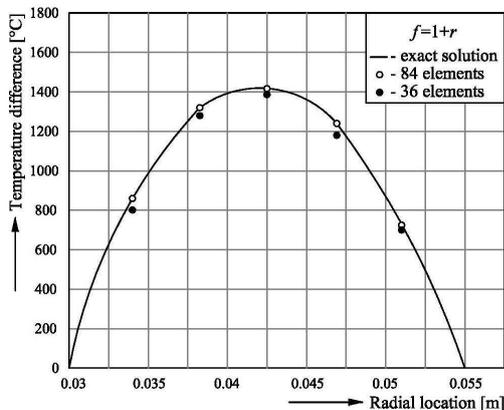


Fig. 13 Temperature profile  $T^*$  of exact solution compared with DRBEM results

Although the converging trend in Fig. 11 and 12 is not monotonic and radial location effect about error magnitude is not exactly following the previously discussed velocity solution case, solution trends can be considered as indistinguishable within 1% relative error.

These test results validate the power of dual reciprocity boundary element method and its solution accuracy, since the numerically solved velocity was used as an input in (3) and source-like function  $b(x, y)$  of (12) in (3) is approximated with interpolating function and nodal values of internal points.

As a final note, all the element cases turns out to be adequate for the solution of this problem. Errors of the velocity and the temperature solution are acceptable.

## VI. CONCLUSIONS

A dual reciprocity boundary element method has been presented for the solution of laminar heat convection problem in a concentric annulus imposed with constant heat flux. DRBEM matrix is formulated to perform the numerical implementation, and five cases of boundary element discretization are tested with the corresponding number of internal points. Five radial locations are selected to obtain the velocity and temperature solutions. Test results are shown to be in excellent agreement with exact solutions for the above 36 element case.

As a final remark, recently developed dual reciprocity boundary element method is successfully applied to solving the laminar heat convection problem in a concentric annulus, and also current study shows its broad potentiality for further applications.

## REFERENCES

- [1] M. Abramowitz and A. Stegun, *Handbook of mathematical functions*, Dover, New York, 1972.
- [2] W. T. Ang, A boundary integral equation method for the two-dimensional diffusion equation subject to a nonlocal condition, *Engineering Analysis with Boundary Elements*, vol. 25, pp. 1-6, 2001.
- [3] A. S. Asad and S. Rama, Finite element heat transfer and structural analysis, *Proceedings of the WSEAS/LASME Int. Conference on Heat and Mass Transfer*, Corfu, Greece, August 17-19, 2004, pp. 112-120.
- [4] A. S. Asad, Heat transfer on axisymmetric stagnation flow an infinite circular cylinder, *Proceedings of the 5<sup>th</sup> WSEAS Int. Conference on Heat and Mass Transfer*, Acapulco, Mexico, January 25-27, 2008, pp. 74-79.
- [5] Y. Asako, H. Nakamura, M. Faghri, Developing laminar flow and heat transfer in the entrance region of regular polygonal ducts, *International Journal Heat Mass Transfer*, vol. 31, pp. 2590-2593, 1988.
- [6] F. Bai and W. Q. Lu, The selection and assemblage of approximating functions and disposal of its singularity in axisymmetric DRBEM for heat transfer problems, *Engineering Analysis with Boundary Elements*, vol. 28, pp. 955-965, 2004.
- [7] U. A. Benz and J. J. Rencis, Coupling two-dimensional and axisymmetric boundary element zones for heat transfer applications, *Engineering Analysis with Boundary Elements*, vol. 26, pp. 455-467, 2002.
- [8] C. A. Brebbia, J. C. F. Telles and L.C. Wrobel, *Boundary element techniques*, Springer-Verlag, New York, 1984.
- [9] C. A. Brebbia and J. Dominguez, *Boundary Elements*, Computational Mechanics Publications, Southampton and Mc. Graw-Hill, New York, 1992.
- [10] H. Chehouani and A. Elmotassadeq, Natural convection heat transfer below a heated downward-facing disk in air, *Continuum Mechanics, Fluids, Heat – Proceedings of the 7<sup>th</sup> WSEAS Int. Conference on Heat and Mass Transfer*, Cambridge, UK, February 23-25, 2010, pp. 73-78.
- [11] G. Chen and J. Zhou, *Boundary Element Methods*, Academic Press, New York, 1992.
- [12] C. Y. Choi and H. C. Kim, Boundary element solutions of the geometrical inverse heat conduction problems using regularization procedure, *Proceedings of the 2nd European Thermal-Sciences and 14th UIT National Heat Transfer Conferences*, vol. 2, 1996, pp. 1089-1095.
- [13] C. Y. Choi, Detection of cavities by inverse heat conduction boundary element method using minimal energy technique, *Journal of the Korean Society for Nondestructive Testing*, vol. 17, no.4, pp. 237-247, 1997.
- [14] S. W. Churchill and H. Ozoe, Correlations for laminar forced convection with uniform heating in flow over a plate and in developing and fully developed flow in a tube, *ASME Journal Heat Transfer*, vol. 95, pp. 78-84, 1973.
- [15] S. Garimella, W. I. Dowling, M. Van der Veen and J. Killion, Heat transfer coefficients for simultaneously developing flow in rectangular tubes, *Proceedings of the 2000 Int. Mechanical Engineering Congress and Exposition*, vol. 2, 2000, pp. 3-11.
- [16] M. A. Goldberg, C. S. Chen and H. Bowman, Some recent results and proposals for the use of radial basis functions in the BEM, *Engineering Analysis with Boundary Elements*, vol. 23, pp. 285-296, 1999.
- [17] S. Kakac, R. K. Shah and W. Aung, *Handbook of single/phase convective heat transfer*, John Wiley, New York, 1987.
- [18] J. H. Kane, *Boundary element analysis in engineering continuum mechanics*, Prentice-Hall, New Jersey, 1994.
- [19] W. M. Kays and M. E. Crawford, *Convective heat and mass transfer*, McGraw-Hill, New York, 1993.
- [20] F. Lösch, *Tables of higher functions*, Teubner, Stuttgart, 1966.
- [21] D. Nardini and A. C. Brebbia, Boundary integral formulation of mass matrices for dynamic analysis, *Boundary Element Research*, vol.2, Springer-Verlag, Berlin and New York, 1985.
- [22] D. Nardini and C. A. Brebbia, A new approach for free vibration analysis using boundary elements, *Boundary Element Methods in Engineering*, Computational Mechanics Publications, Southampton, pp. 312-326, 1982.
- [23] A. J. Novak and A. C. Brebbia, The multiple reciprocity method: A new approach for transforming BEM domain integrals to the boundary, *Engineering Analysis*, vol. 6, no. 3, pp. 164-167, 1989.
- [24] F. Paris and J. Cañas, *Boundary element method: fundamentals and applications*, Oxford University Press, Oxford, 1997.
- [25] W. P. Partridge and A. C. Brebbia, Computer implementation of the BEM Dual reciprocity method for the solution of general field equations, *Communications Applied Numerical Methods*, vol. 6, no. 2, pp. 83-92, 1990.
- [26] P. W. Partridge, C. A. Brebbia and L. C. Wrobel, The dual reciprocity boundary element method, *Computational Mechanics Publications*, Southampton, 1992.
- [27] P. W. Partridge, Dual reciprocity BEM: Local versus global approximation functions for diffusion, convection and other problems, *Engineering Analysis with Boundary Elements*, vol. 14, pp. 349-356, 1994.
- [28] P. W. Partridge, New developments in the dual reciprocity method, *Boundary Elements XVII*, Computational Mechanics Publications, Southampton, pp. 11-18, 1995.
- [29] P. W. Partridge and B. Sansale, The method of fundamental solutions with dual reciprocity for diffusion and diffusion-convection using subdomains, *Engineering Analysis with Boundary Elements*, vol. 24, pp. 633-641, 2000.
- [30] H. Power and R. Mingo, The DRM subdomain decomposition approach to solve the two-dimensional Navier-Stokes system of equations, *Engineering Analysis with Boundary Elements*, vol. 24, pp. 107-119, 2000.
- [31] I. Sârbu, *Numerical modellings and optimizations in building services*, Politechnica Publishing House, Timisoara, 2010.
- [32] R. K. Shah and A.L. London, *Laminar flow forced convection in ducts*, Academic Press, New York, 1978.
- [33] W. G. Sim and J. M. Kim, Application of spectral collocation method to conduction and laminar forced heat convection in eccentric annuli, *KSME International Journal*, vol. 10, no. 1, pp. 94-104, 1996.
- [34] L. Skerget and Z. Rek, Boundary-domain integral method using a velocity-vorticity formulation, *Engineering Analysis with Boundary Elements*, vol. 15, pp. 359-370, 1995.
- [35] C. L. Wrobel, and A. C. Brebbia, The dual reciprocity boundary element formulation for nonlinear diffusion problems, *Computer Methods in Applied Mechanics and Engineering*, vol. 65, no. 2, pp. 147-161, 1987.
- [36] C. L. Wrobel and D. B. DeFigueiredo, A dual reciprocity boundary element formulation for convection diffusion problems with variable velocity fields, *Engineering Analysis with Boundary Elements*, vol. 8, pp. 312-319, 1991.
- [37] T. Yamada, L.C. Wrobel and H. Power, On the convergence of the dual reciprocity boundary element method, *Engineering Analysis with Boundary Elements*, vol. 13, pp. 291-298, 1994.