

Positioning Robotic System Used in Manufacturing Operations

Paul Ciprian Patric
Automatics Department
Valahia University of Targoviste
 Targoviste, Romania
 patic@valahia.ro

Marin Mainea
Electrical Engineering Faculty
Valahia University of Targoviste
 Targoviste, Romania
 marin_mainea@yahoo.com

Gabriela Mantescu
Inst. of Research for Science Technology
Valahia University of Targoviste
 Targoviste, Romania
 gabriela.mantescu@gmail.com

Lucia Pascale
Automatics and Informatics Department
Valahia University of Targoviste
 Targoviste, Romania
 lucia.p2005@yahoo.com

Abstract—There are many definitions of the robot, which is a universal machine, used to perform some intellectual, human, motor functions. One of the most important robot classes is manipulating robots for manufacturing operations, which include industrial robots. The construction of flexible manufacturing cells and the industrial robot driving system requires the use of certain techniques of artificial intelligence used to construct superior hierarchical levels, advanced predictive control techniques in inferior hierarchical materialization. The goal of this paper is to make a study on the kinematics of the mechanisms involved in robot composition, the theoretical data of the dynamics of industrial robotic systems and the structure of a robotic position system used in manipulation operations in order to optimize and correct the performances.

Keywords—*Artificial Intelligence, Gripper, Industrial Robots, Robotic mechanism, Position study, Sensors System.*

I. INTRODUCTION

The robot is a complex automated system that has the role of manipulating the parts and tools, replacing the action of human.

An industrial robot is a system that does not operate in isolation, it communicates with other robots and machine tools, conveyor belts, thus reaching the idea of a flexible manufacturing cell. Although this term is often accepted and used together with the term C.I.M. (Computer Integrated Manufacturing), but optimization and management of the manufacturing cell, is still a problem for engineers. To achieve flexibility in use, together with the safety and autonomy of operation, a unified approach to the robotic manufacturing cell is required, combining automatic and artificial intelligence elements [1], [9].

Main applications of industrial robots are contour or dot welding, assembly operations, painting, molding of large parts, quality control, handling of radioactive substances or toxic substances.

The industrial robot is defined as a three-dimensional, reprogrammable, multifunctional manipulator capable of

moving materials, tools, parts or special devices after scheduled trajectories to perform multiple manufacturing operations [13].

II. THE ELECTRICAL DRIVES

To complete the main application one need to explain the robotic system from two points of view: electric hardware and the software part.

A. The electrical control box

In Fig. 1, from below, one can see the electrical control box. Two controllers for the linear axes forming the XOZ system and the four feeders (two for the axle controllers and two for the two linear axis motors) are mounted at the top of this box. For space considerations, the electric grill controller is not mounted in the box. It is positioned on the work table, made of aluminum profiles.



Fig. 1. Electrical control unit

In Fig. 2 one can see that the electrical control unit is positioned in an accessible panel, its position helping very much the human operator in handling and in exploitation the device [4], [12].

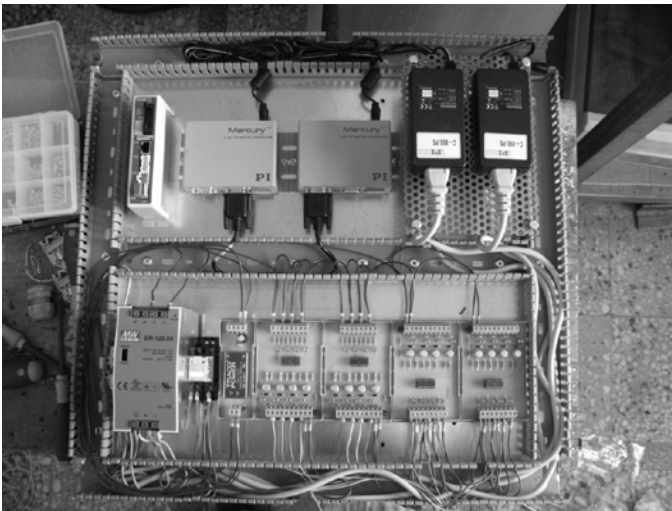


Fig. 2. The electrical control unit is positioned in an accessible panel.

If you are using A4-sized paper, please close this file and download the file "MSW_A4_format".

B. The Optical safety barriers

In order to avoid accidental intrusion into the working area of the operator's hands or foreign objects, the system has been designed with optical safety barriers, such as the OMRON F3S-B182P-L / F3S-B182P-D. These barriers have the function of stopping the operation of the mechatronic system if, in the workspace, the operator inserts the hand or various objects that can distort the effects of the working cycle [7].

The characteristics of the optical barriers are as follows:

Number of optical rays: $10 \div 70$.

Height of the protected area: 500 mm.

Detection distance: $0.2 \div 6$ m.

III. SPECIALIZED SOFTWARE. SOFTWARE TESTING

The micromechanical positioning is done by specialized software.

Testing the software consists of the following steps:

- current application to programmable software / controller;
- generating I / O signals to prepare the system configuration;
- introducing into memory the specific program by console programming or by software tools added to the system;
- after programming, any code error is checked by diagnostic functions; if possible, one can simulate an entire operation to check if everything is OK.
- running the system: before pressing the start button, need to check in detail if the input and output wiring is correctly executed in accordance with the I / O assignment. Once the correct wiring is confirmed, the application can be started [3], [5], [8].

A verification operation must be performed to check the operating system and an adjustment of the control system, if necessary. Complete testing runs until the mechatronic system is safe to operate.

The LS3 limiter senses the closed position of the gripper. To start / stop the cycle there are 1 start button - PB1 and 1 stop button - PB2 [10], [14].

The components of this application have been assembled, positioned and adjusted and subjected to partial and complete operation tests. Finally, the design and modeling cycle has been achieved.


The mechatronic micro-position system physically performed together with the implemented protection system is shown in Fig. 3 [2].



Fig. 3. The micro-position mechatronic system, located in the protected space, on the work table

IV. MICRO-GRIPPER SUBSYSTEM WITH TWO FINGERS

One used a CAD software to design the gripper system with two fingers.

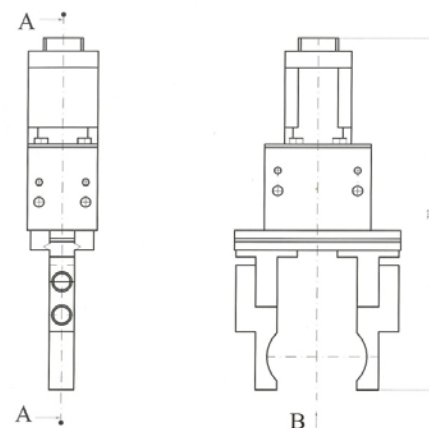

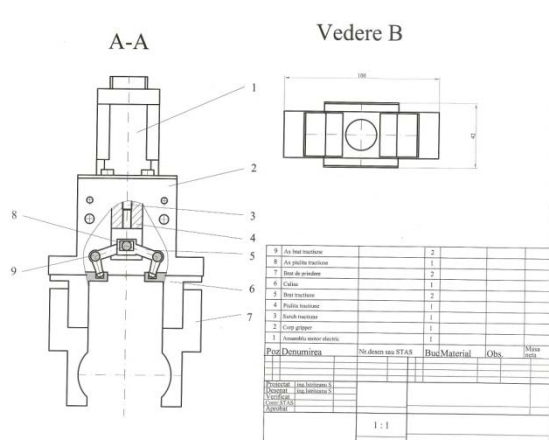


Fig. 4. Microgriper design using AutoCAD software

And the section view is presented below.

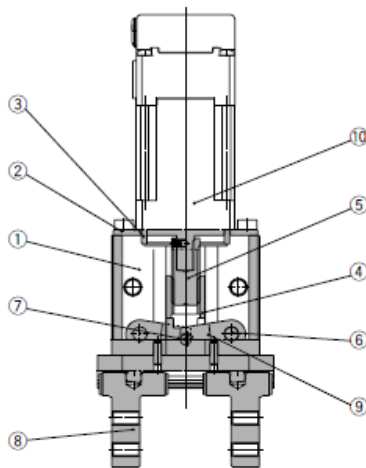


Fig. 5. Section through the Gripper prehensile mechanism

TABLE I. DESCRIBE THE GRIPPER MECHANISM

Nr.crt.	Describe	Material	Observations
1.	Body	Aluminum alloy	Anodized
2.	Tray engine	Aluminum alloy	Anodized
3.	Guide ring	Aluminum alloy	-
4.	Sliding nut	Stainless steel	Thermal treatment + special treatment
5.	Sliding bolt	Stainless steel	Thermal treatment + special treatment
6.	Guide roll	High carbon chrome steel	-
7.	Guide roll	High carbon chrome steel	-
8.	Fingers assembly	-	-
9.	Arm	Special Stainless steel	-
10.	Step by step motor	-	-

In Table 1 the information on the materials from which the parts of the prehensile mechanism are made is centralized.

The overall gauge and functional dimensions of the LEHZ32-K2-22 gripper subassembly model are shown in Fig. 6.

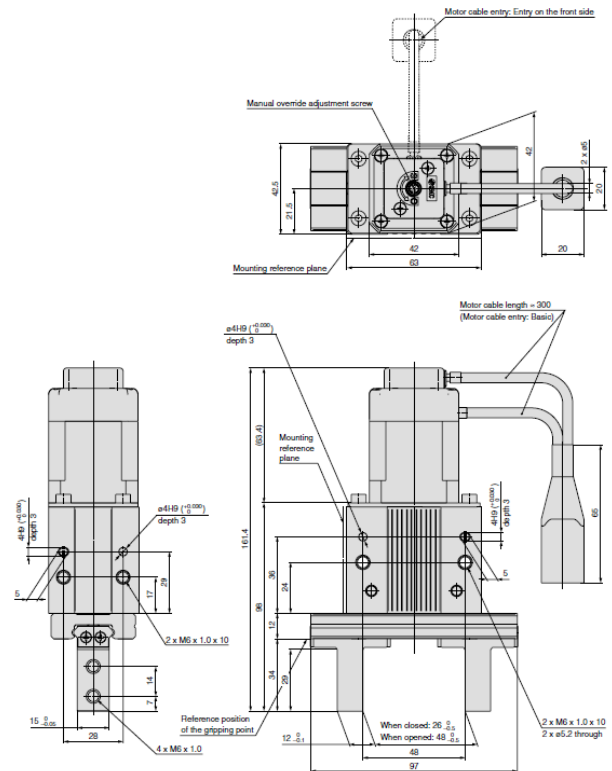


Fig. 6. Overall and functional dimensions of the LEHZ 32- K2-22 gripper subassembly

V. THE KINEMATIC SCHEME OF THE GRIPER SUBASSEMBLY

The kinematic scheme of the gripper subassembly is shown in Fig. 7 [6].

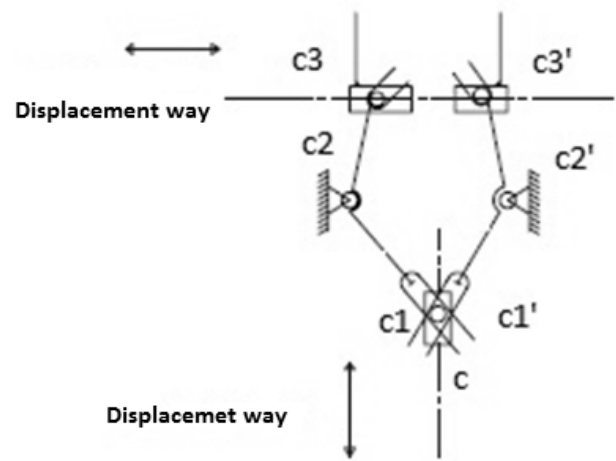


Fig. 7. The kinematic scheme of the gripper subassembly

Where:

C – screw-nut couple;

C1, C1' - roto-translation couple;

C2, C2' – roto-translation couple;

C3, C3' – translation couple.

The mechatronic system, designed as required, has as a requirement the movement and positioning of the gripper in a vertical plane (Fig. 8). Getting the movement in the vertical plane on the two axes, X and Z directions, is accomplished with two kinematic screw-nut couplings; the first coupling for displacement on OX horizontal, the second couple for vertical displacement on OZ axis [2].

The gripper will execute the motion for which it was projected, in a horizontal plane and perpendicular on the vertical plane in which it was positioned [11].

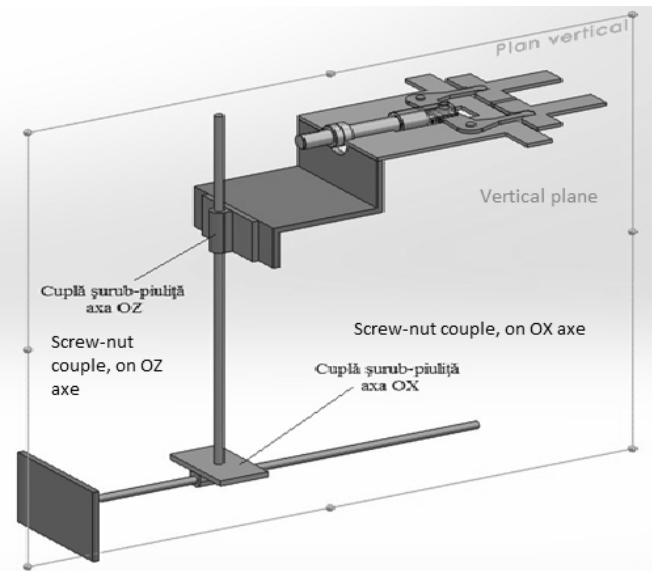


Fig. 8. The kinematics of the virtual model of the robotic system

The gripper is a mechanism on which the base is the screw-nut couple of the second mechanism. Its action is also made by a rotating motor, resulting the translation in the mirror of the two fingers (Fig. 9).

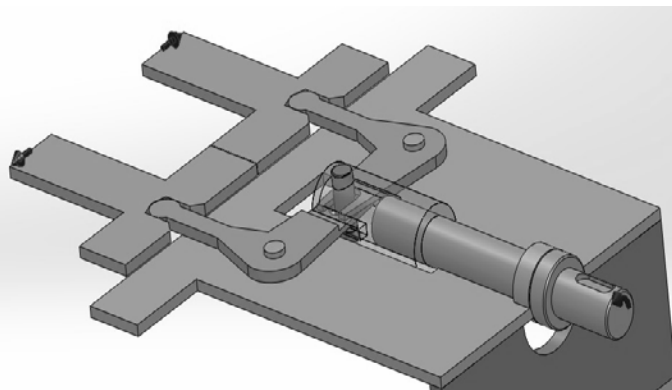


Fig. 9. Scheme of the second mechanism (displacement on the OZ axis).

In the figure from below, it can be seen that for the 11 mm stroke of the finger, a primary form of the lever was built. This ensures that it is operated by the symmetry axis of the gripper and the desired displacement is obtained in the perpendicular direction along the symmetry axis [11], [15].

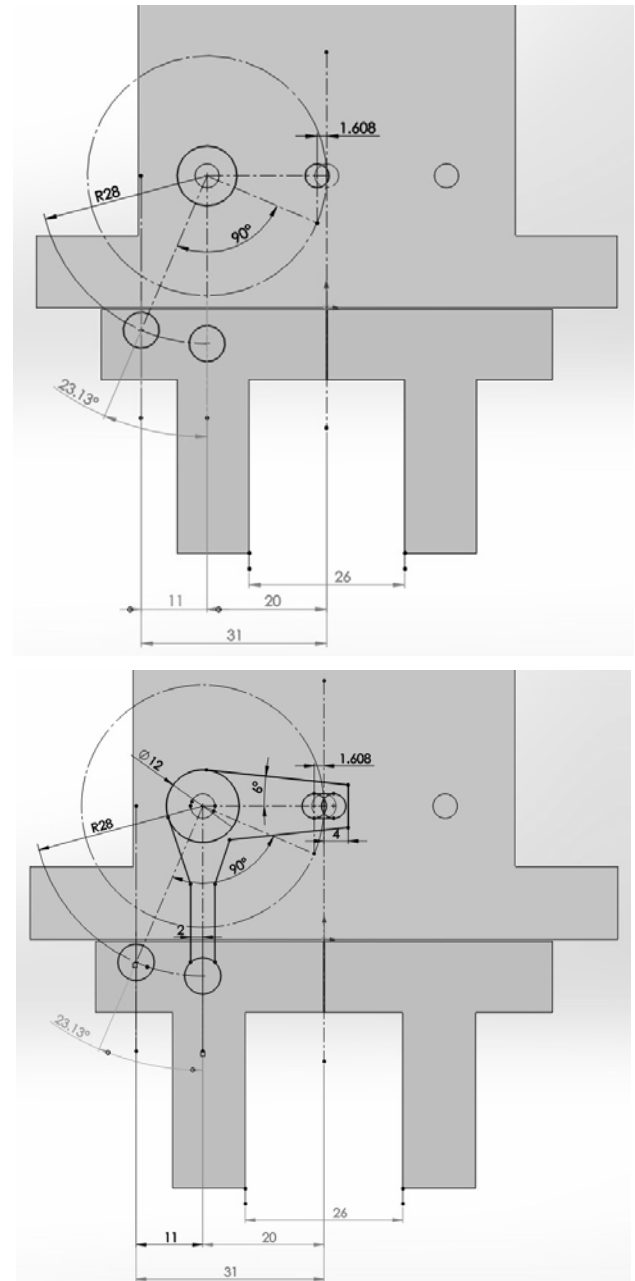


Fig. 10. The geometry obtaining 11 mm stroke for a finger

The finger movement for the 11mm stroke is achieved by building a lever. The lever is an element of the mechanism that conveys the movement from the screw-nut assembly to the finger. This, transforms the well-determined translational movement from one direction into a translational movement determined in another direction, perpendicularly, by a rotation motion (Fig. 10).

In the symmetrical, mirroring operation of the two fingers, the two levers have the same action point. In the case of the finger, a coupling (class IV) is created that transforms the translation motion of the motion screw into the rotation of the lever. (Fig. 11).

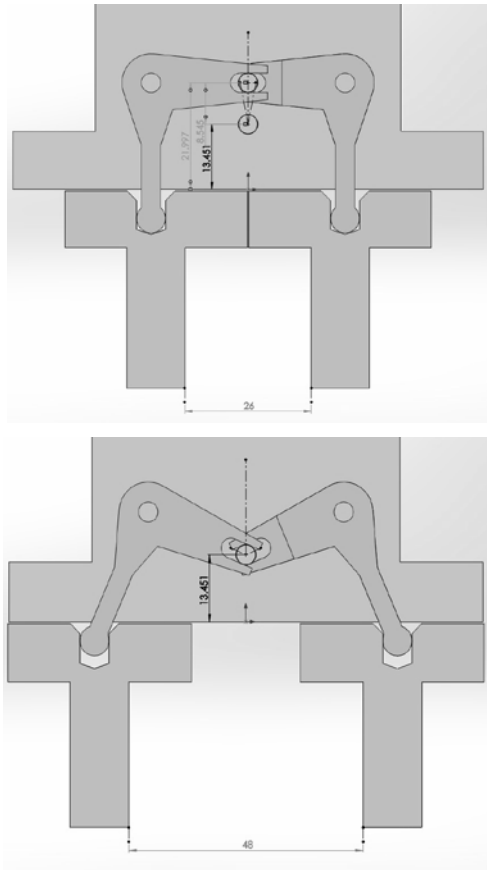


Fig. 11. Construction of the link coupling between the lever and the movement screw

At the construction and positioning of motion screw of gripper interior looks like in the following figure [11]:

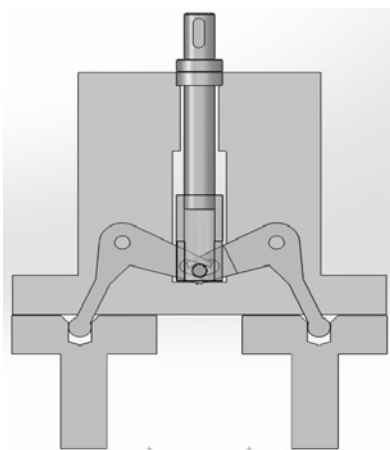


Fig. 12. The final shape of the gripper mechanism

CONCLUSION

The industrial robot is defined as a three-dimensional, reprogrammable, multifunctional manipulator, capable of moving special materials, tools, parts or devices along programmed trajectories to perform multiple manufacturing operations.

The robotic system for micro-position was developed, designed and modeled in a modular structure in the Modeling and Simulation Laboratory of the Faculty of Electrical Engineering.

In this paper one proposed to underline, study and present the following objectives: Analysis of the action and structure of an industrial robotic system for the purpose of implementation in the manufacturing processes; Presentation of an industrial robot; Functionally optimal optimization of a mechatronic micro-powering system used in handling operations; Programming for manipulation of different objects; Planning the dynamics of the robot in Cartesian coordinates, generating trajectories connecting two points of the workspace; Obtaining simultaneous joints of the micro-powder mechatronic system used in step-by-step manipulation operations.

REFERENCES

- [1] Armas Ioana, Robotica – Integrated Manufacturing, A.G.I.R Publishing House, 2011.
- [2] Berian Sergiu, Maties Vistrian, Transdisciplinarity and mechatronics, Curtea Veche Publishing House, 2011.
- [3] Borangiu Theodor, Dumitrache Alexandru, Anton Florin Daniel, Robots Programming, A.G.I.R, Publishing House 2010.
- [4] Buiu Catalin, Advanced systems for driving autonomous robots, Electra (ICPE) Publishing House, 2003.
- [5] Dutta Ashish, Robotic Systems - Applications, Control and Programming, Publisher InTech, 2015.
- [6] Kucuk Serdar, Serial and Parallel Robot Manipulators - Kinematics, Dynamics, Control and Optimization, Publisher InTech, 2012
- [7] Miltiadis Dr., Boboulos A., Automation and Robotics, BookBoon Publishing House, 2012.
- [8] Negrescu Liviu, Negrescu Lavinia, Robots programming for beginners - part I, Sfantul Ierarh Nicolae Publishing House, 2013.
- [9] Oprean Aurel, Drimer Dolphi, Dorin Alexandru, Alexandrescu Nicolae, Industrial Robots and Manipulators, Tehnica Publishing House, 1996.
- [10] Patric Paul Ciprian, Pascale L., Mantescu G., Punching automatic line served by a portal robot, Journal of Applied Mechanics and Materials - Materials Science, Mechanical Structures and Engineering, Volume 680, 2014, pp. 330 – 333.
- [11] Patric P. C., Popa I. F., Zemouri R., Mechatronic Micro-Positioning System used in Handling Operations, 17th International Multidisciplinary Scientific GeoConference SGEM 2017, Conference Proceedings, ISBN 978-619-7408-29-4 / ISSN 1314-2704, 27 - 29 November, 2017, Viena, Austria, Vol. 17, Issue 63, pp. 35 - 42.
- [12] Saal Carol, Ţopa Iulian, Micu Emil, Fransua Alexandru, Electric drives and automation devices, Didactică and Pedagogică Publishing House, 1980.
- [13] Zisopol Dragoş Gabriel, Industrial Robots, UPG Ploieşti Publishing House, 2006.
- [14] <http://yamaho.eu/files/roboti.pdf>
- [15] <http://biblioteca.regielive.ro/proiecte/organe-de-masini/proiect-licenta-roboti-industriali-100082.html>.